

FIG. 1

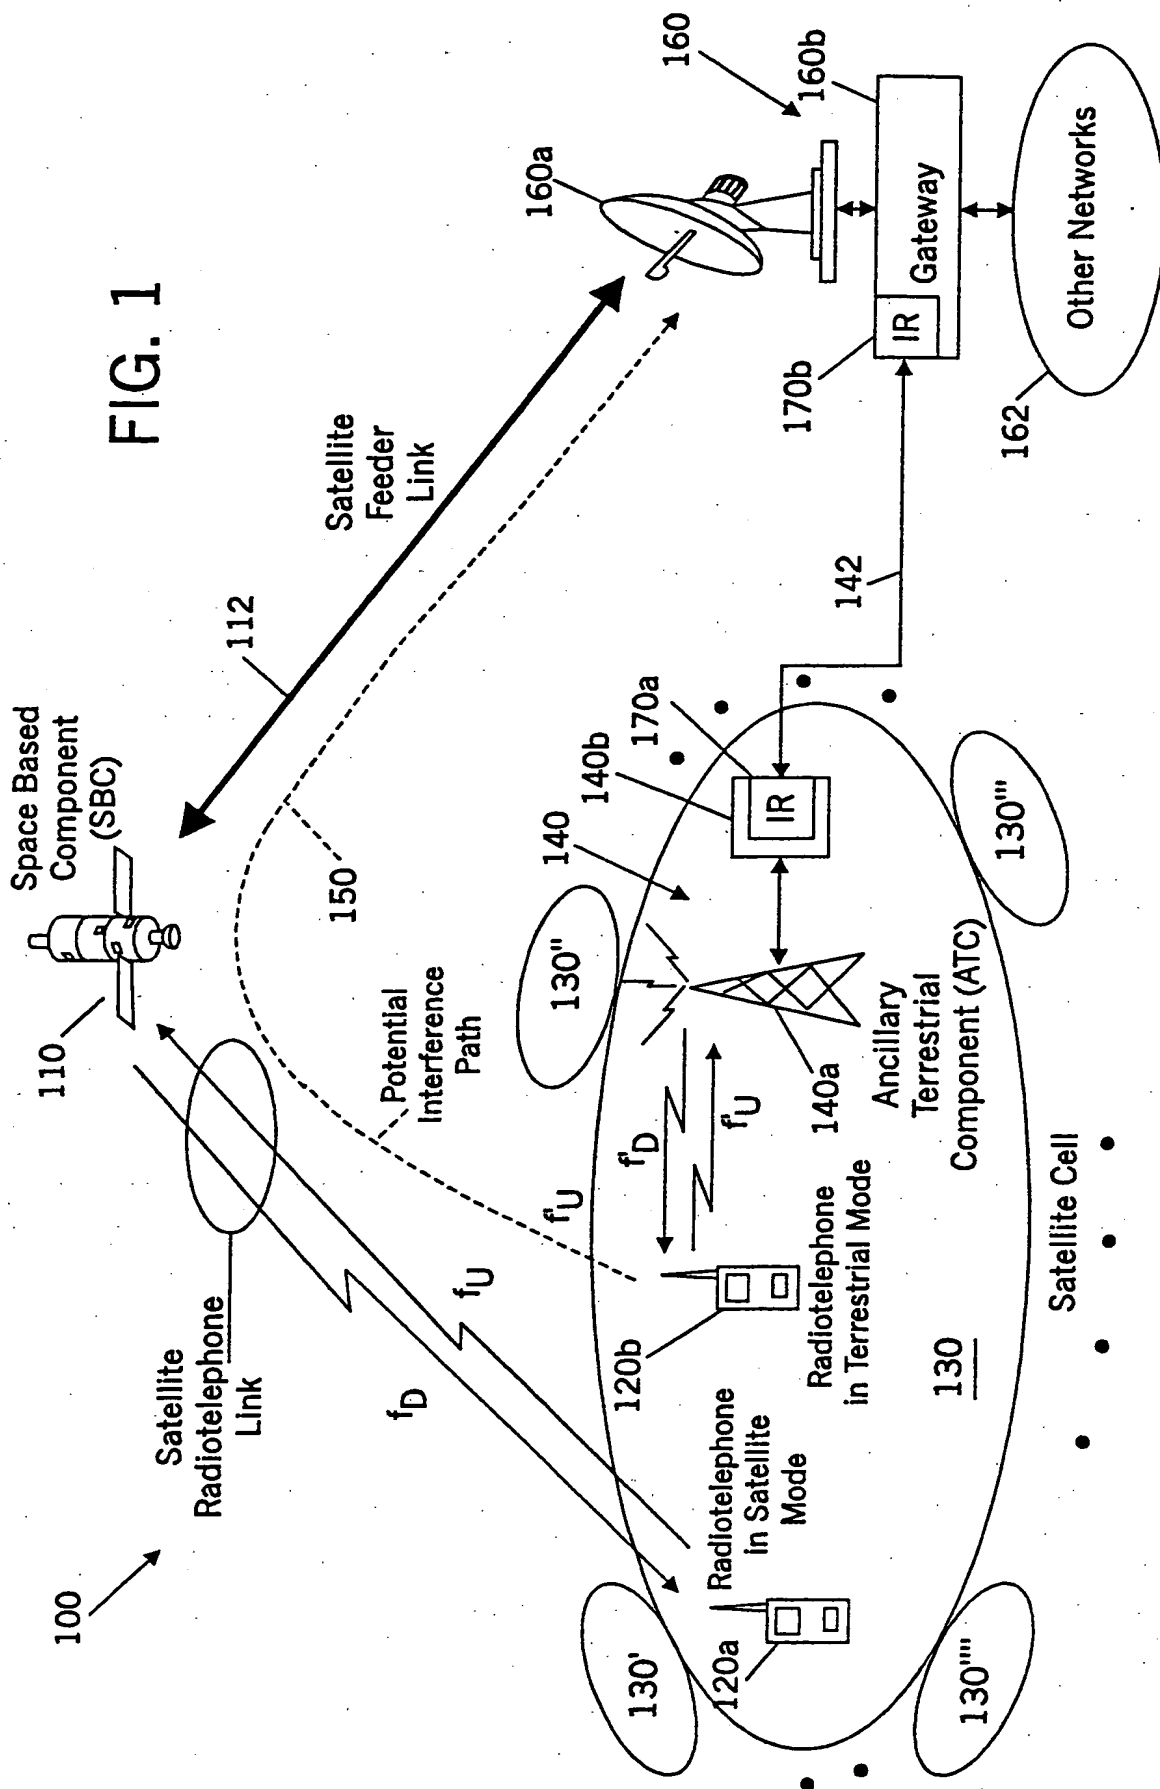
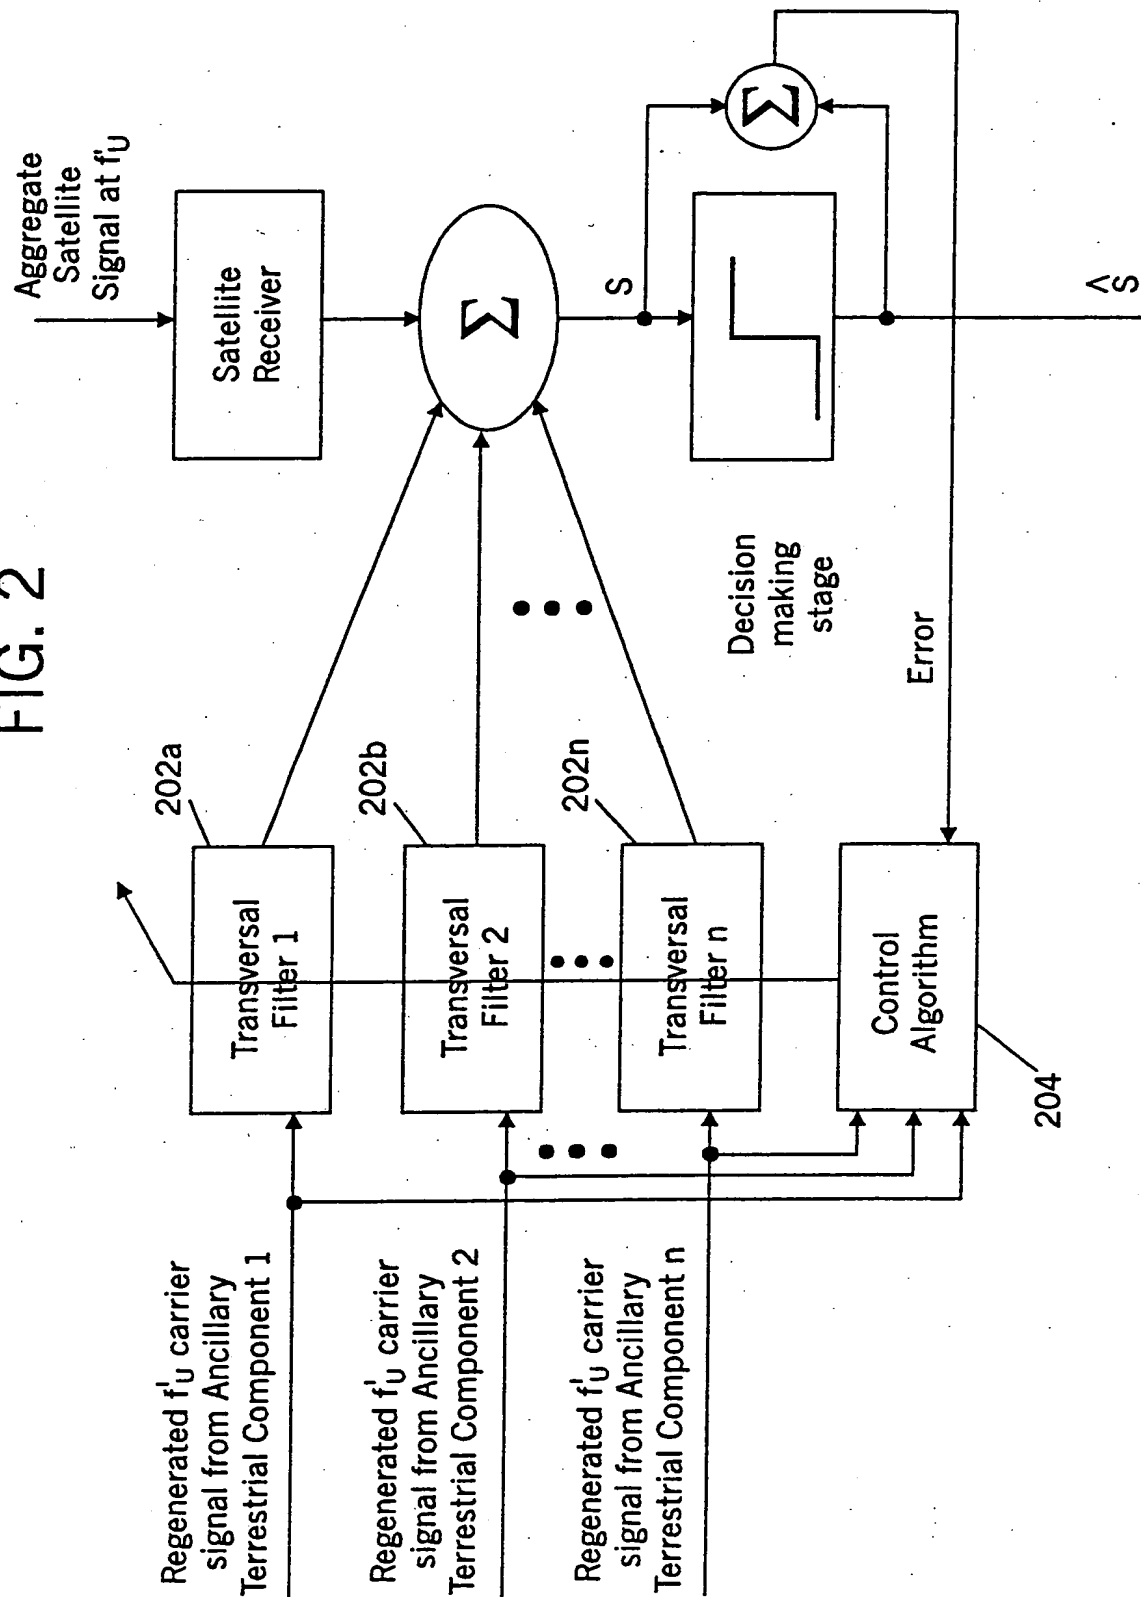


FIG. 2



**FIG. 3**

The diagram shows a frequency spectrum from 1525 MHz to 1660.5 MHz. Key features include:

- Cellular Satellite Forward Link:** Indicated by a satellite icon and a downward arrow at the bottom left.
- Cellular Satellite Return Link:** Indicated by a satellite icon and an upward arrow at the top right.
- GPS/GLONASS Band:** A shaded region between 1559 MHz and 1605 MHz.
- Radio Astronomy:** Indicated by a lightning bolt symbol between 1605 MHz and 1613.8 MHz.
- Globalstar:** Indicated by a lightning bolt symbol between 1613.8 MHz and 1622 MHz.
- Iridium:** Indicated by a lightning bolt symbol between 1622 MHz and 1626.5 MHz.


	0	1	2	3	4	5	6	7	Full-rate GSM Frame Slot Numbers
Full-rate GSM Frame in TDD Mode									
	TX1	TX2	TX3	TX4	RX1	RX2	RX3	RX4	At ATC 140
									
	RX				TX				At Radiotelephone 120b

FIG. 4

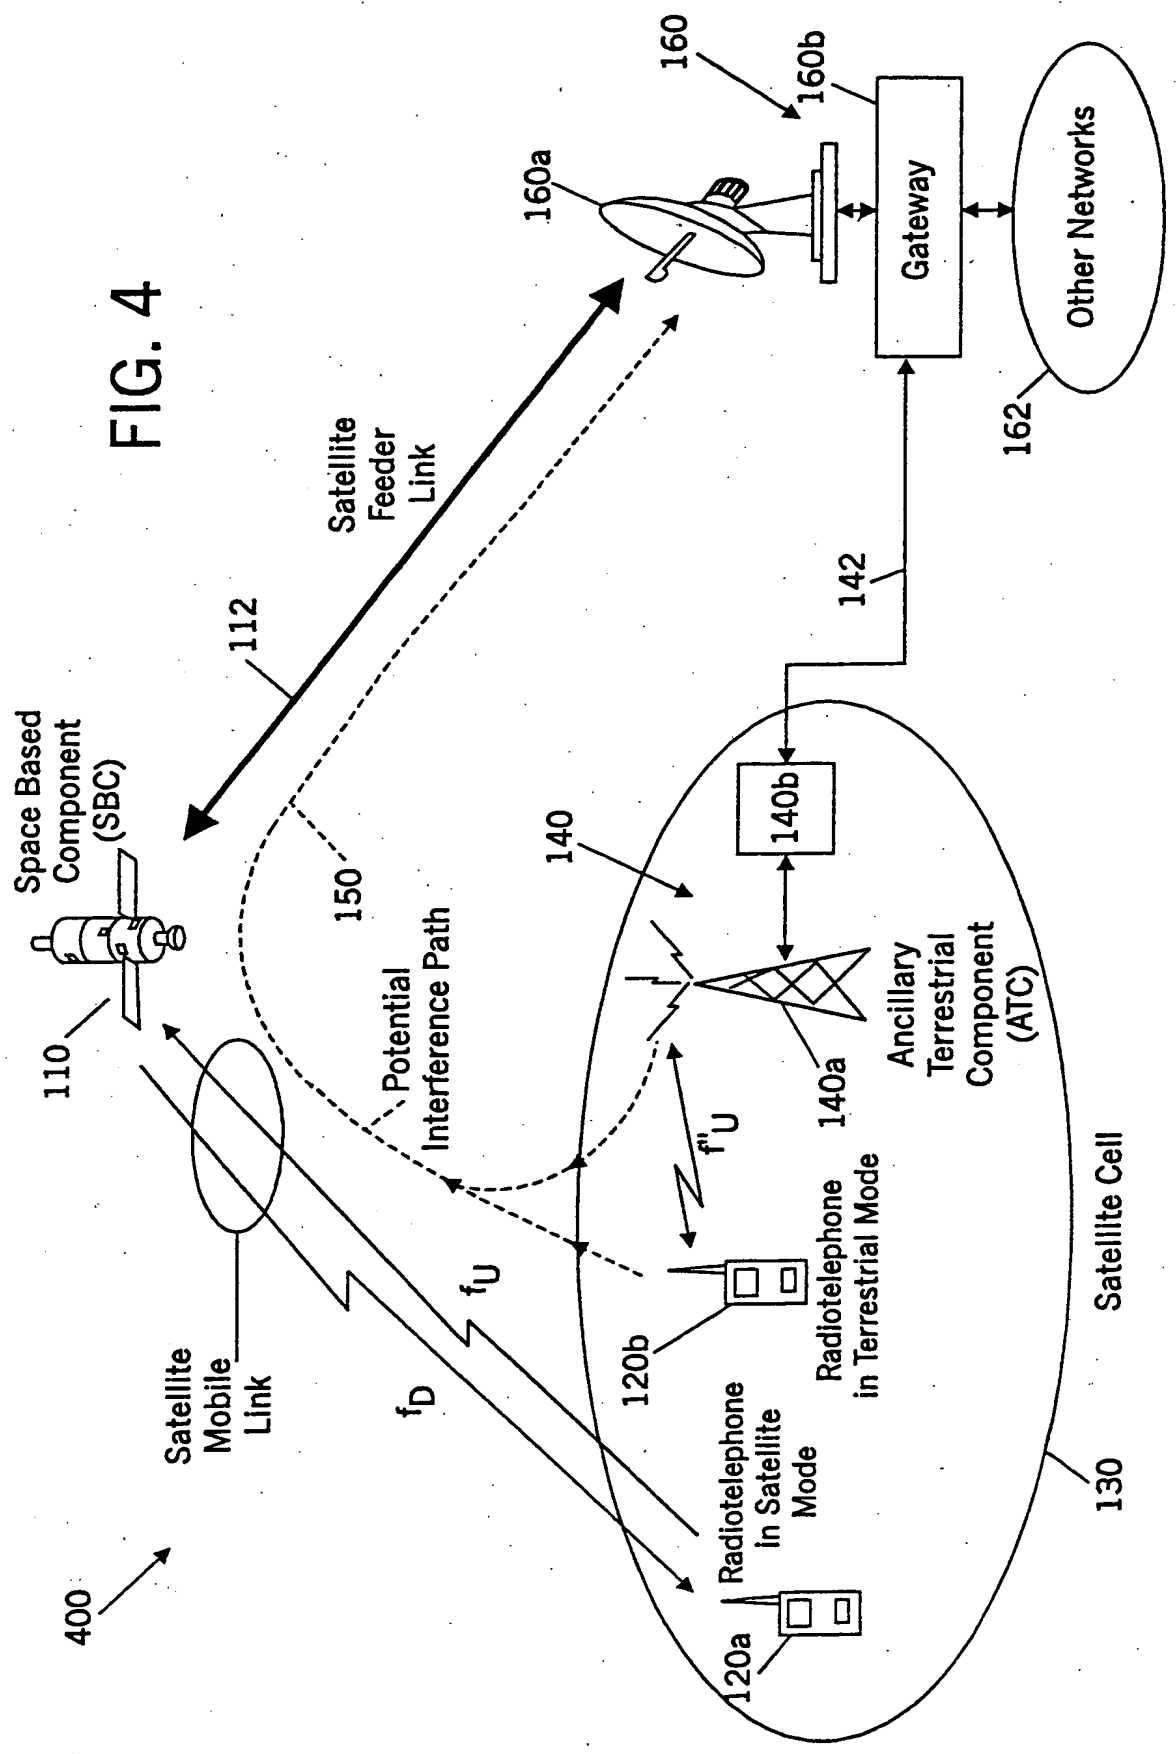


FIG. 6

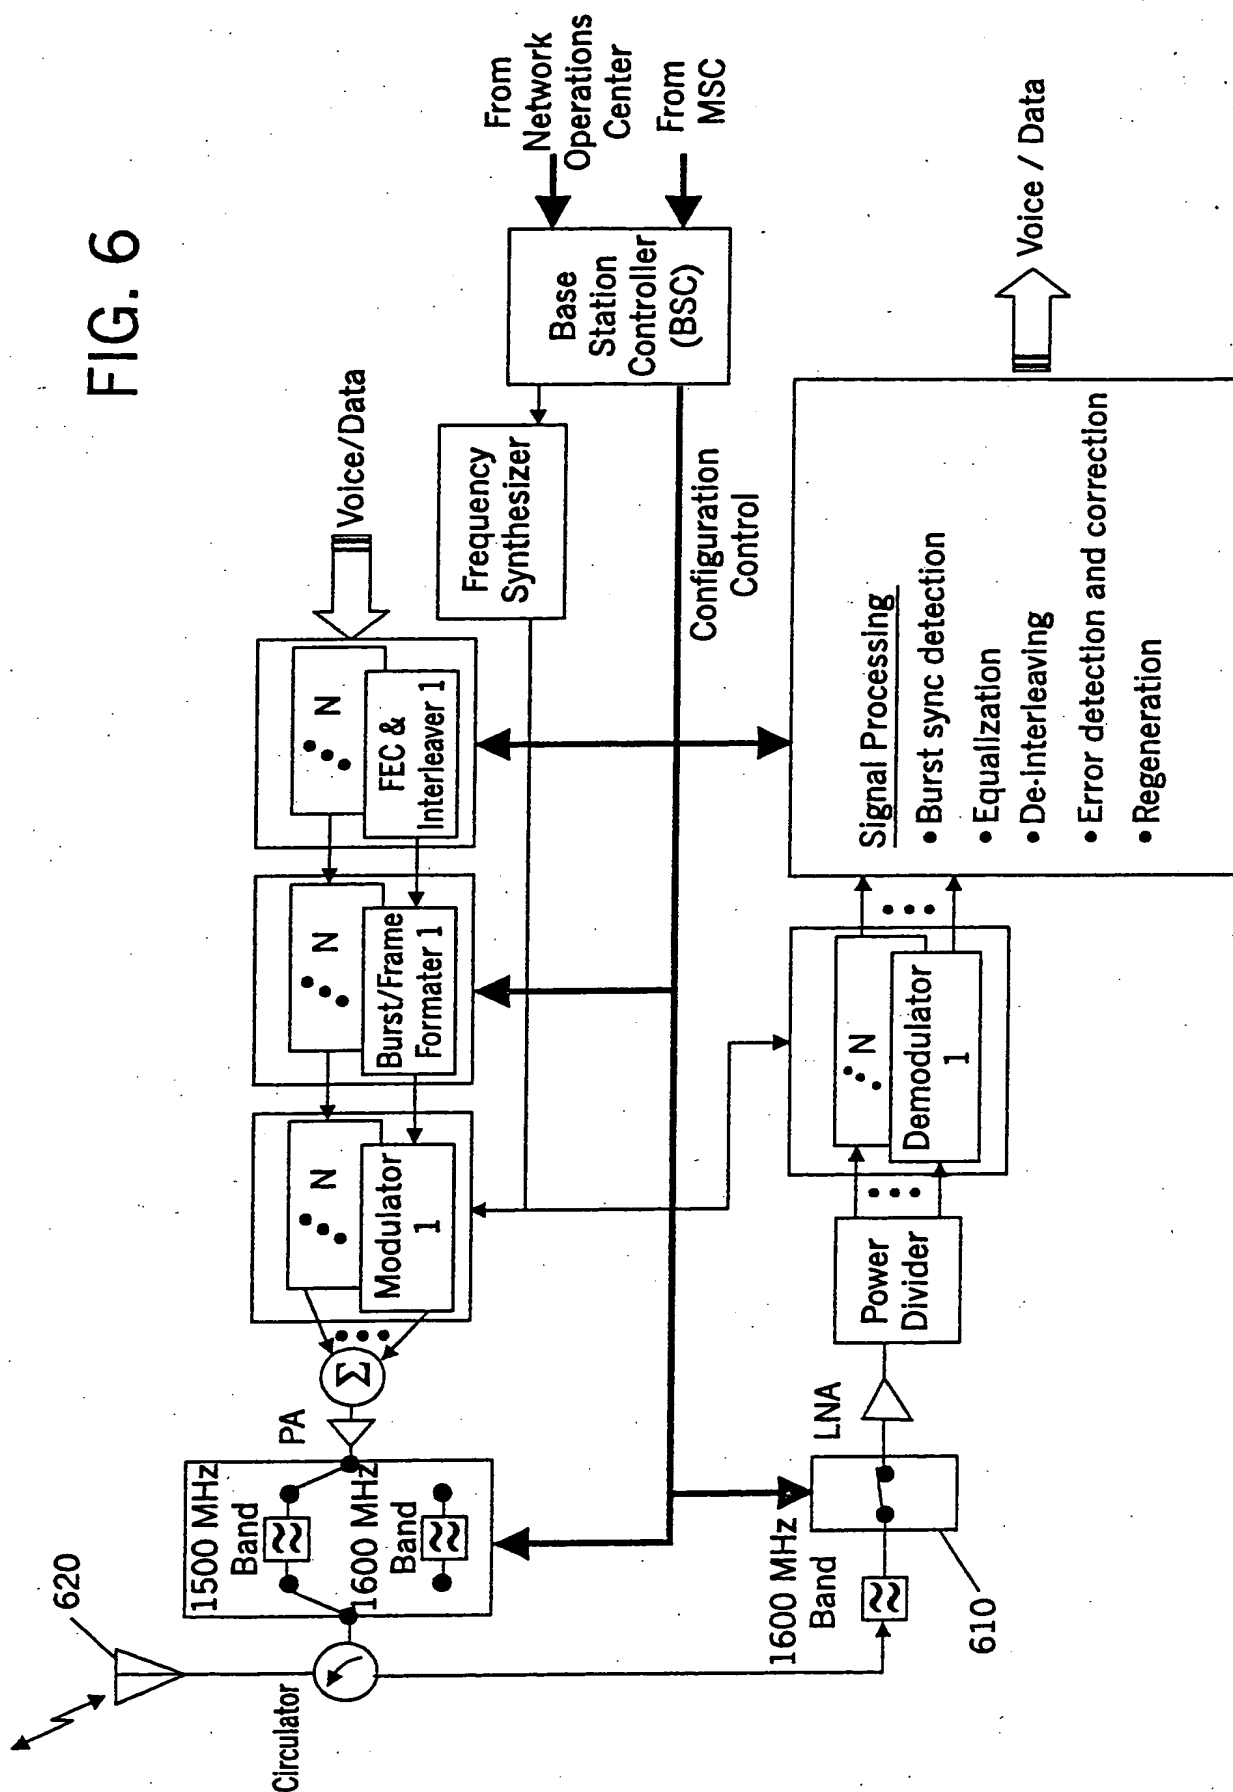
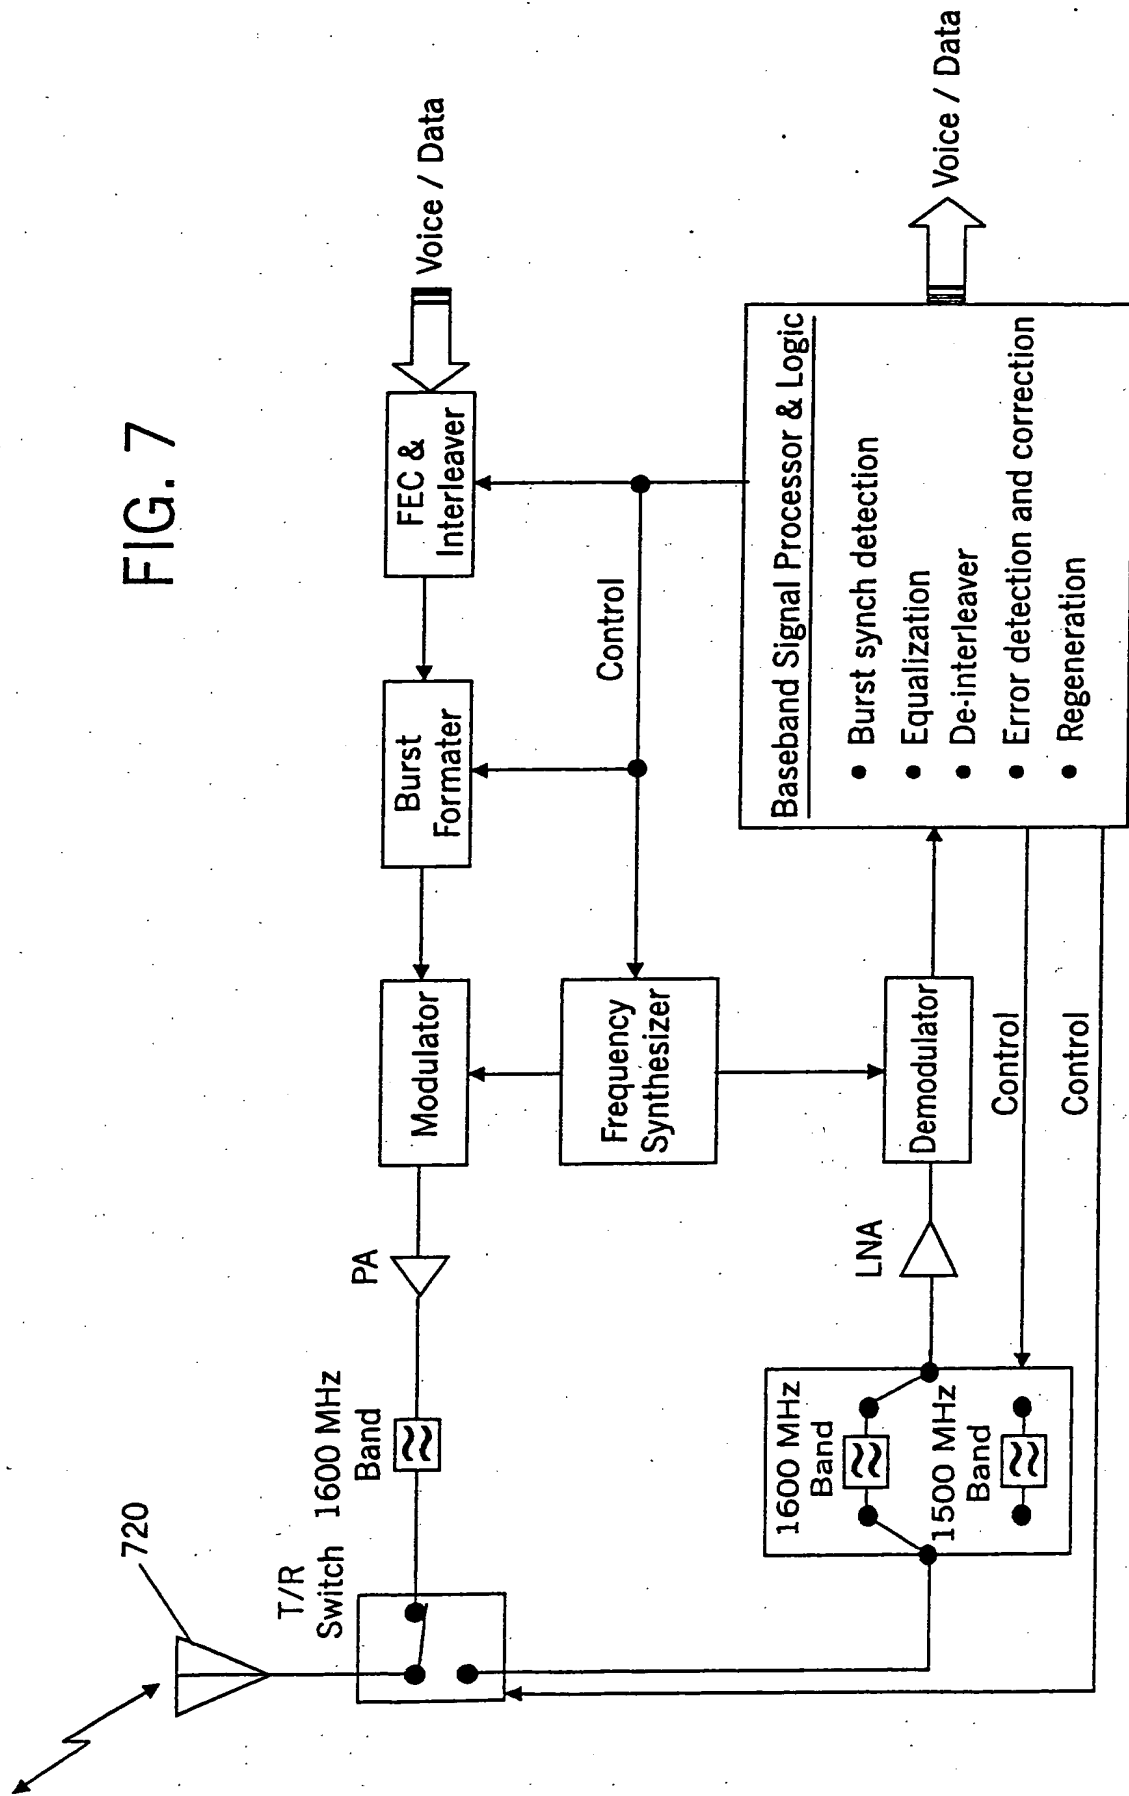


FIG. 7



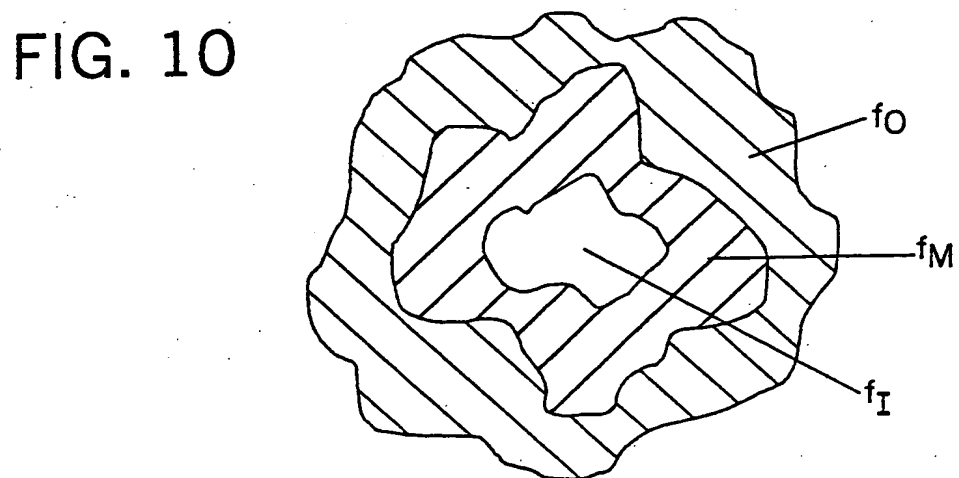
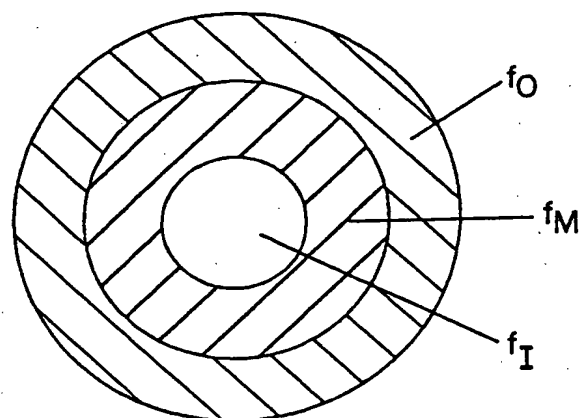
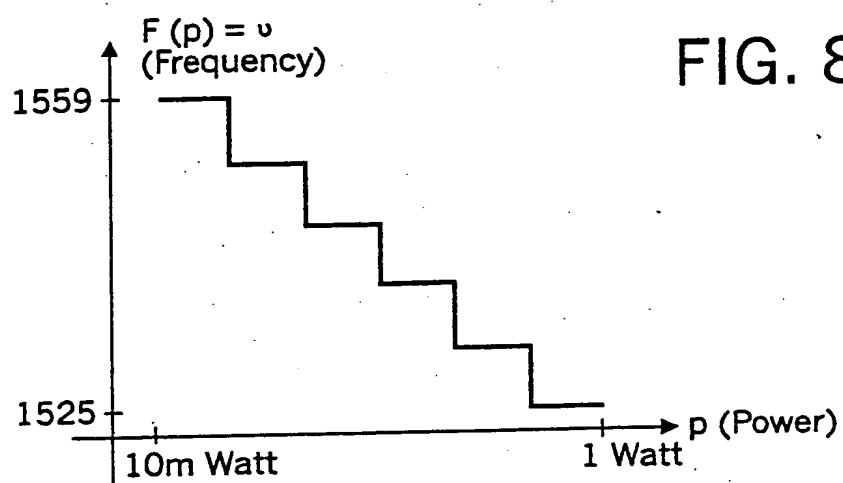


FIG. 11

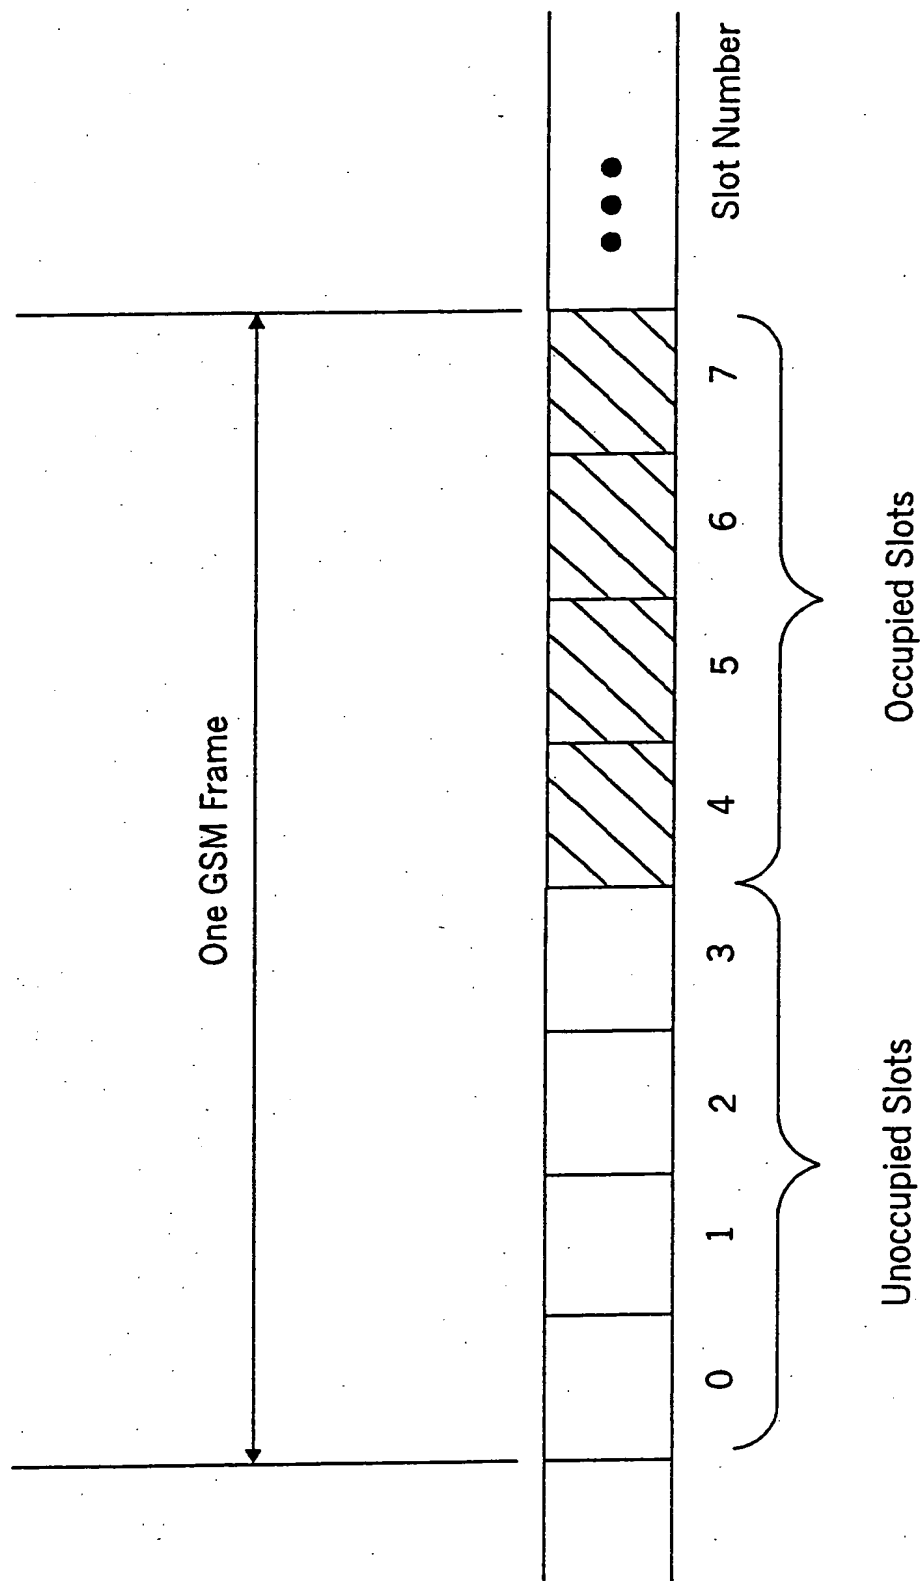




FIG. 12

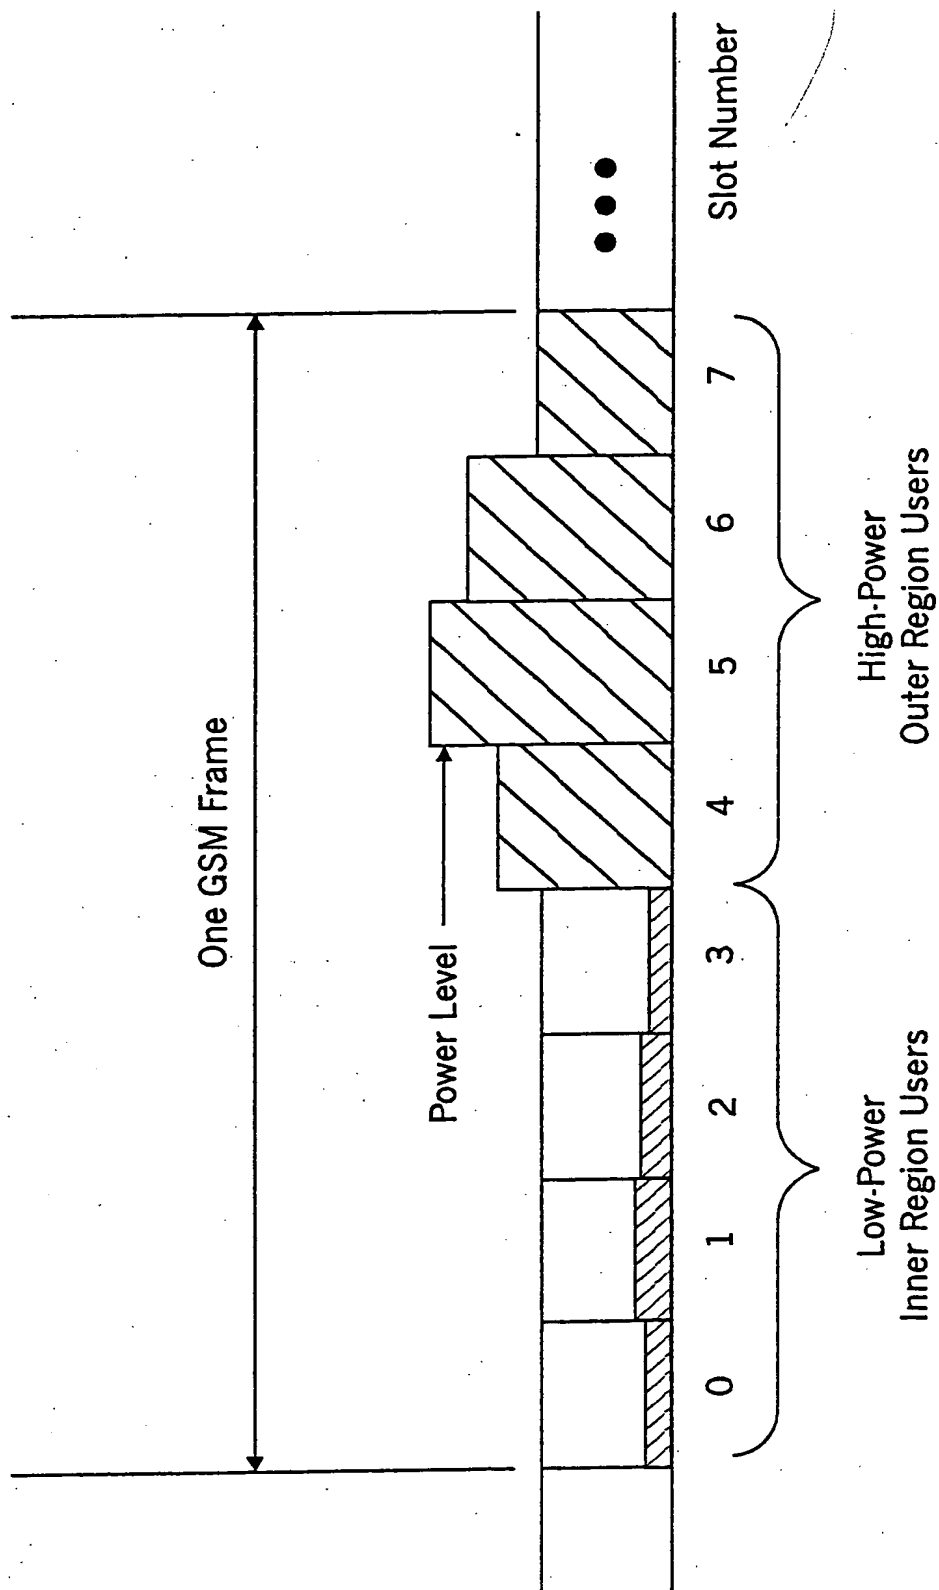


FIG. 13

